

Veľká výkonnosť v malom zariadení

Ušetríte čas s vysokotlakovým výkonom

Rada zariadení ToughTek je navrhnutá špeciálne pre aplikáciu striekaných protipožiarnych náterov s nízkou, strednou a vysokou hustotou, ktoré sú nanášané hladkým a plynulým prietokom pri nástreku.

Zariadenia ToughTek sú vybavené technológiou piestovej pumpy, ktorá umožňuje vysokým tlakom presúvať materiály cez hadice veľkých dĺžok - s možnosťou dlhšej aplikácie a lepšieho dosahu dokončíte prácu rýchlejšie. Efektívne využijete Váš čas pre samotnú aplikáciu a strávite menej času presúvaním zariadenia po pracovnej ploche.

Jednoduché použitie

Použitie zariadení ToughTek je jednoduché a intuitívne, Váš personál bude pripravený okamžite pracovať.


- Zapojte a pracujte – zariadenie ToughTek F340e je možné pripojiť do štandardnej 120V zásuvky
- Variable speed control – dial in the exact speed needed
- Optional remote start/stop switch – lets the nozzle man start or stop the pump

Compact, portable and easy to move

The ToughTek Fireproofing Pump's compact design and small footprint makes it easy to transport onto the jobsite. Take it anywhere – doorways, halls and elevators. ToughTek Fireproofing Pumps fit into tight spaces so you can spray with ease.

Save money with overall durability

The ToughTek Fireproofing Pump's durable piston pump stands up to highly abrasive fireproofing materials. Its quick knockdown design makes maintenance fast and easy. You eliminate the frequent expense of replacing pump parts.

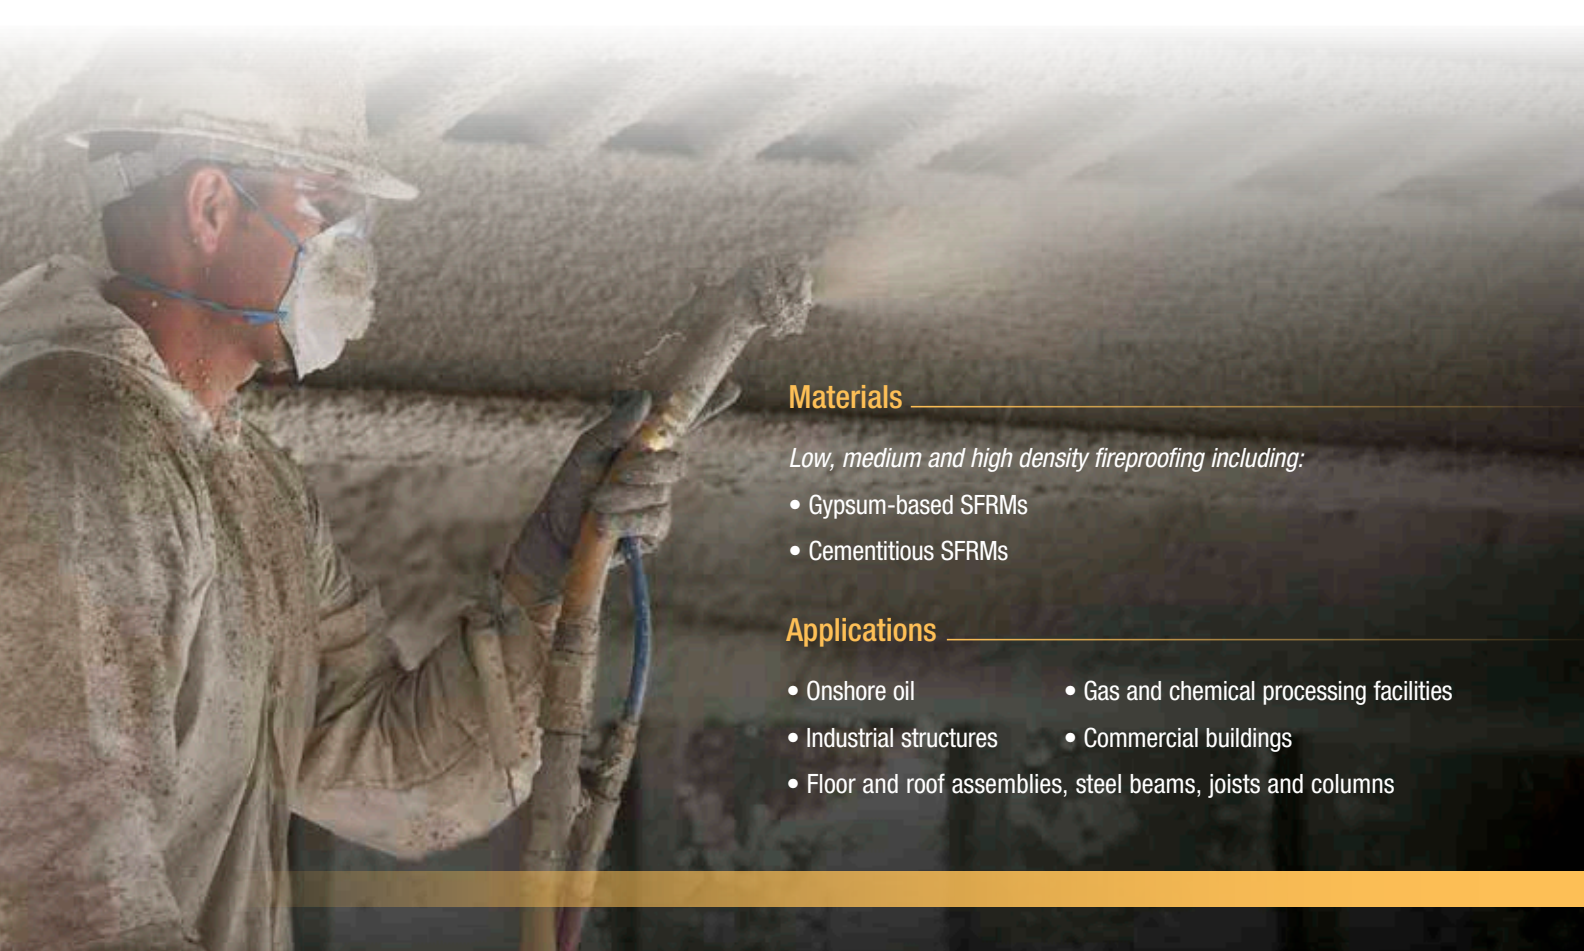

Materials

Low, medium and high density fireproofing including:

- Gypsum-based SFRMs
- Cementitious SFRMs

Applications

- Onshore oil
- Industrial structures
- Floor and roof assemblies, steel beams, joists and columns
- Gas and chemical processing facilities
- Commercial buildings

ToughTek F680e Fireproofing Pump



Pivoting Pump Lower

- For easy maintenance

Easy to Clean Hopper

- Rugged polyethylene construction
- 20 gal (76 L) capacity



Variable Speed

- Dial in the exact speed needed, from low to high volume output

Optional Remote On/Off Switch

- Start or stop the pump at the nozzle

Flat Proof Tires

- Withstand the worst jobsite debris



Compact and Portable

- Easy to move

Hose Cam and Groove Connection

- For fast, easy assembly

Low Power Requirements

- Plugs into standard 120V wall outlet
- No electrician or rewiring needed

Pump Lower

- Designed for heavy materials, rugged steel construction
- Quick knockdown

Tool-less Hopper Removal

- Disconnects in seconds to clean

Ideal for difficult-to-reach locations, the compact ToughTek F340e Portable Fireproofing Pump is a rugged, dependable workhorse for fireproofing materials.

Ordering Information

ToughTek F340e Portable Pumps

F340e Packages include: 50 ft (15 m) hose and 24Y619 pole applicator. All F340e units include material hopper.

25A500	F340e bare, 120V, 15A, 1-ph
25A501	F340e pkg, 120V, 15A, 1-ph
25A502	F340e bare, w/ remote on/off switch, 120V, 15A, 1-ph
25A503	F340e pkg w/ remote on/off switch, 120V, 15A, 1-ph
25A504	F340e bare, 230V, 10A, 1-ph
25A505	F340e pkg, 230V, 10A, 1-ph
25A506	F340e bare, w/ remote on/off switch, 230V, 10A, 1-ph
25A507	F340e pkg w/ remote on/off switch, 230V, 10A, 1-ph

ToughTek F680e Pumps

F680e Packages include: 75 ft (23 m) hose and 24Y619 pole applicator.

All F680e units include remote on/off switch and material hopper.

24Y500	F680e bare, w/ air compressor, 230V, 30A, 1-ph
24Y501	F680e pkg w/ air compressor, 230V, 30A, 1-ph
24Y502	F680e bare, no air compressor, 230V, 18A, 1-ph
24Y503	F680e pkg, no air compressor, 230V, 18A, 1-ph
24Y504	F680e bare, w/ air compressor, 400V, 16A, 3-ph
24Y505	F680e pkg w/ air compressor, 400V, 16A, 3-ph
24Y506	F680e bare, no air compressor, 400V, 16A, 3-ph
24Y507	F680e pkg, no air compressor, 400V, 16A, 3-ph

Parts and Accessories

17G550	1 in hose, 25 ft (7.5 m), 1000 psi max working pressure
17G551	1.25 in hose, 50 ft (15 m), 750 psi max working pressure
17G552	1.5 in hose, 50 ft (15 m), 750 psi max working pressure
17G767	Hose adapter (connects 1 in hose to 1.25 or 1.5 in hose)
17G554	F340e remote switch kit
24Y479	F680e forklift stabilization kit

Recommended Repair Parts

17H194	Outlet check valve
17H193	Pump inlet elbow
17H242	Pump rebuild kit (all soft seals and check balls)
16W510	Carbide inlet seat with o-ring
17H191	Piston seat with o-ring
17H197	Remote On/Off Switch with 100 ft (30 m) cable

Technical Specifications

	F340e	F680e
Pump type	2-ball piston	2-ball piston
Max working pressure	600 psi (41 bar, 4.1 MPa)	500 psi (34 bar, 3.4 MPa)
Max spray pressure	500 psi (34 bar; 3.4 MPa)	500 psi (34 bar; 3.4 MPa)
Max output (bags/hour)*	Up to 20	Up to 30
Max output**	6.5 gpm (24 lpm)	10.8 gpm (41 lpm)
Volume control	Variable	Variable
Max hose length	1 in dia x 100 ft (30.5 m)	300 ft (91.5 m)†
Conveying distance - vertical	Up to 50 ft (15 m)	Up to 200 ft (61 m)
Hopper capacity	20 gal (76 L)	30 gal (114 L)
Hopper opening (W x D)	22.5 x 14 in (57 x 36 cm)	20.5 x 27.5 in (52 x 70 cm)
Hopper/filling height	26 in (66 cm)	26 in (66 cm)
Pump outlet size	1 in cam groove (m)	1.5 in cam groove (m)
Dimensions (L x W x H)	45.5 x 24 x 38 in (116 x 61 x 97 cm)	62.25 x 33 x 46 in (158 x 84 x 117 cm)
Weight	210 lb (95 kg) (without hose and applicator)	625 lb (284 kg)
Chemical compatibility	Water based materials	Water based materials
Max air compressor pressure	NA	75 psi (5.2 bar, 0.52 MPa)
Max air compressor flow	NA	10 cfm (compressor models only)
Air compressor outlet size	NA	¼ in QD (f) fitting
Wetted parts	SST, aluminum, carbide seats, plated steel, PTFE, UHMWPE, LLDPE, urethane, solvent-resistant elastomer	
Remote on/off switch	Optional	Included
Air compressor	Optional	Optional
Manual	3A3109	3A3110

* Tested with high density cementitious fireproofing material. Performance will vary based on material, mix consistency, hose size and other factors. Check with material suppliers or contact your Graco distributor for a demonstration. ** Theoretical † Hose length comprised of 1.5 in dia x 200 ft (61 m) + 1.25 in dia x 50 ft (15 m) + 1 in dia x 50 ft (15 m)

Contact us today!

For more information, e-mail toughtek@graco.com, call 877-844-7226 or visit us online at www.graco.com.



©2015 Graco Inc. 349425 Rev. B 9/15 All written and visual data contained in this document are based on the latest product information available at the time of publication. Graco reserves the right to make changes at any time without notice. All other brand names or marks are used for identification purposes and are trademarks of their respective owners.

