King™ Electric airless sprayer



The electric solution for spraying protective coatings



Meet the new King

Graco's King electric airless sprayer combines the benefits of the traditional pneumatic airless sprayer, like the robust ATEX design, simple maintenance and strength, with the benefits of an electric unit like energy cost savings, eliminating icing problems and noise reduction.

ELECTRIC POWER

	NO NEED For an air compressor	ENVIRONMENTAL FRIENDLY	CONSISTENT QUALITY
W	Avoid the inefficiencies associated with compressors.	Contribute to a cleaner energy future.	Less pulsation to always obtain a good pattern regardless of which tip you use.

COST SAVINGS

IMPROVED EFFICIENCY	ENERGY SAVINGS	STAY PRODUCTIVE
Improved efficiency and an overall lower cost of ownership.	Saves up to 80% of energy costs when compared to an air operated sprayer.*	Stay productive by using the most reliable power source available – electricity!

^{*} Study completed for a pump pressure of 241 bar (3500 psi) for 20 hours/week; spraying 1226 L (324 gal) of 73% volume solids epoxy with an XHD519 tip

ATEX APPROVED

	ATEX, IECEX, AND CLASS 1, DIV. 1 APPROVALS	SAFE OPERATION	SPRAY SOLVENT-BASED COATINGS
>	Allows one to work at any location where generating a spark is of concern.	Get the job done safely: approved for hazardous locations.	Protect yourself against risks from hazardous solvents.

USER COMFORT

PLUG IN & SPRAY	A QUIET ELECTRIC MOTOR	NO MORE ICING
Runs on widely available 240V/15A or 110V/25A power.	When compared to an air motor, the King electric sprayer is up to five times quieter.	By eliminating the need for an air motor, it is possible to avoid all icing problems.



Whatever the application, Graco has the solution

The Graco King electric airless sprayer is a more energy efficient coating sprayer than the majority of sprayers on the market. Not only that, but it has a low cost of ownership due to the lack of compressor maintenance costs. In other words, you save money every single day.

Applications

- Chemical plants
- In-plant paint shops
- Marine jobs

- Metal fabrication
- Rail jobs
- Refineries & off shore work
- Storage tanks
- Structural steel
- Water and wastewater coatings




About a customer



PBP Services (Scotland) Ltd is a 3rd generation family-run business operating since 1968 based in Fraserburgh in the North East of Scotland, providing a blasting & coating service to large sections of the fishing fleet based throughout the UK and Europe. They have also diversified to work in the oil & gas industry with an operation in Bahrain.

"We purchased the electric airless sprayer to provide extra pressure for applying anti-fouling coatings to a ship's hull to achieve energy cost savings by eliminating the use of compressed air. We recently bought a second protective coating unit and believe that this has produced a big advantage for our business, and also see these units as a welcome addition to our painting fleet!

Peter Bruce - Owner at PBP Services (Scotland) Ltd

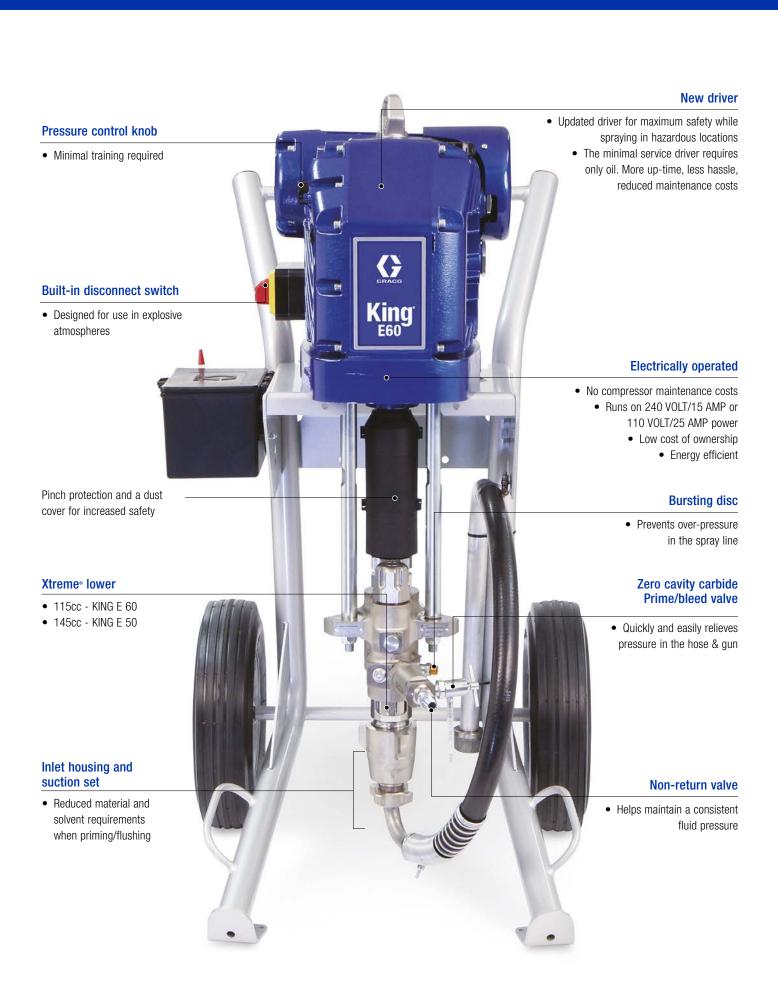

Which system is right for you?

The King electric airless sprayers are available in two models: E60 and E50. Regardless of the maximum working pressure you require, Graco has the right sprayer for you.





MODEL	E60 King electric sprayer	E50 King electric sprayer
Maximum working pressure	414 Bar (6000 psi, 41.4 MPa)	310 Bar (4500 psi, 31.0 MPa)
Supported tip size*	0.53 mm (.021 in) @ 345 bar (5000 psi, 34.5 MPa) spray pressure	0.58 mm (.023 in) @ 276 bar (4000 psi, 27.6 MPa) spray pressure
Weight	135 Kg (295 lb)	135 Kg (295 lb)
Overall dimensions (W x H x D)	70 x 127 x 74 (27.5 x 50.0 x 29.0 in)	70 x 127 x 74 (27.5 x 50.0 x 29.0 in)
Operating temperature range	5°C to 50°C (23°F to 120°F)	5°C to 50°C (23°F to 120°F)
Power input	15A @ 200-240V, 50/60 Hz, single phase; 25A @ 100-120V, 50/60 Hz, single phase	15A @ 200-240V, 50/60 Hz, single phase; 25A @ 100-120V, 50/60 Hz, single phase
Sound pressure	70 dB (A)	70 dB (A)
Pump lower	115cc	145cc
Operating manual	3A8126	3A8126

^{*} The actual supported tip size may be larger or smaller depending on: the actual input voltage, hose length, paint type, paint thinning, and paint temperature.

Ordering information

KING E60 - 414 BAR (6,000 PSI, 41.4 MPA)

273246	. Cart mount,	integrated filte	er, complete package
273247	. Cart mount,	integrated filte	er, bare package
273250	. Wall mount,	integrated filte	er, complete package
273251	. Wall mount,	integrated filte	er, bare package

Complete packages include the XTR7 spray gun, XHD 315 and XHD417 tip, 3/8" x 15 metre (50 ft) Xtreme Duty hose, 1.8 metre (6 ft) whip hose

KING E50 - 310 BAR (4.500 PSI, 31,0 MPA)

273252	Cart mount,	integrated	filter,	complete package
273253	Cart mount,	integrated	filter,	bare package
273256	Wall mount,	integrated	filter,	complete package
273257	Wall mount.	integrated	filter.	bare package

Complete packages include the XTR7 spray gun, XHD 315 and XHD417 tip, 3/8" x 15 metre (50 ft) Xtreme Duty hose, 1.8 metre (6 ft) whip hose

HEAVY FLUID PACKAGES:

273262.......... KING E60 cart mount, no filter, heavy fluids with hopper, complete 273264........ KING E50 cart mount, no filter, heavy fluids with hopper, complete

Packages include a 38 litre (10 gal) SST hopper, XHF spray gun, XHD419 and XHD521 tip, 1/2" x 15 metre (50 ft) Xtreme Duty hose, 1.8 metre (6 ft) whip hose.

ACCESSORIES

25D234 Repair kit for the KING E50, lower (145cc)	
273267 Repair kit for the KING E60, lower (115 cc)	
24X570 Kit, 38 litre (10 gal) SST hopper	
224459 60 mesh fluid filter element, twin pack	
224468 100 mesh fluid filter element, twin pack	
16W645 Gear box oil for electric driver (1 litre)	
25D515 Replacement suction hose kit, 1 in NPT, 1 m (3 ft)	
25F044Suction hose kit, 20 litre (5 gal) pail, 2 m (6 ft)	á
20A584 Suction hose kit, 200 litre (55 gal) pail, 2 m (10 ft)	Š
24Z267 Cable assembly, with 1 gland, 8 m, hazardous locations*	8
24Z268 Cable assembly, with 1 gland, 15 m, hazardous locations*	
24Z269 Cable assembly, with 1 gland, 30 m, hazardous locations*	
24Z271Cable assembly, with 2 glands, 8 m, hazardous locations**	
24Z272Cable assembly, with 2 glands, 15 m, hazardous locations**	
24Z273 Cable assembly, with 2 glands, 30 m, hazardous locations**	
25P468 Kit cable, incl. cable gland, 4.5 metre cable and CEE 7/7 plug, only for non-hazardous locations	;



^{* 1-}gland cables have a single gland rated for use in hazardous locations. Recommended when the power supply is outside the hazardous location.

^{** 2-}gland cables are rated at both ends, allowing for connection to a power supply rated for use within the hazardous location.



ABOUT GRACO

Founded in 1926, Graco is a world leader in fluid handling systems and components. Graco products move, measure, control, dispense and apply a wide range of fluids and viscous materials used in vehicle lubrication, commercial and industrial settings.

The company's success is based on its unwavering commitment to technical excellence, world-class manufacturing and unparalleled customer service. Working closely with qualified distributors, Graco offers systems, products and technology that set the quality standard in a wide range of fluid handling solutions. Graco provides equipment for spray finishing, protective coating, paint circulation, lubrication, and dispensing sealants and adhesives, along with power application equipment for the contractor industry. Graco's ongoing investment in fluid management and control will continue to provide innovative solutions to a diverse global market.

GRACO LOCATIONS

MAILING ADDRESS
P.O. Box 1441
Minneapolis, MN 55440-1441
Tel: 612-623-6000
Fax: 612-623-6777

AMERICAS

MINNESOTA
Worldwide Headquarters
Graco Inc.
88-11th Avenue N.E.
Minneapolis, MN 55413

EUROPE

BELGIUM
European Distribution Center
Graco Distribution BV
Industrieterrein-Oude Bunders
Slakweidestraat 31
3630 Maasmechelen,
Belgium
Tel: 32 89 770 700

Tel: 32 89 770 700 Fax: 32 89 770 777

ASIA PACIFIC

AUSTRALIA Graco Australia Pty Ltd. Suite 17, 2 Enterprise Drive Bundoora, Victoria 3083 Australia Tel: 61 3 9468 8500 Fax: 61 3 9468 8599

CHINA
Graco Fluid Equipment
(Shanghai) Co.,Ltd
Building 7, No. 1-2,
Wenshui Road 299
Jing'an District
Shanghai 200436
P.R. China
Tel: 86 512 6260 5711
Fax: 86 21 6495 0077

INDIA

Graco Hong Kong Ltd.
India Liaison Office
Room 432, Augusta Point
Regus Business Centre 53
Golf Course Road
Gurgaon, Haryana
India 122001
Tel: 91 124 435 4208
Fax: 91 124 435 4001

JAPAN Graco K.K. 1-27-12 Hayabuchi Tsuzuki-ku Yokohama City, Japan 224002

Yokohama City, Japan 2240025 Tel: 81 45 593 7300 Fax: 81 45 593 7301

KOREA

Notice 1 38, Samsung 1-ro 1-gil Hwaseong-si, Gyeonggi-do, 18449 Republic of Korea Tel: 82 31 8015 0961 Fax: 82 31 613 9801

All written and visual data contained in this document are based on the latest product information available at the time of publication. Graco reserves the right to make changes at any time without notice.

Graco is certified ISO 9001.

Europe +32 89 770 700 FAX +32 89 770 777 WWW.GRACO.COM